



Proposed Roundabout - Route 96 at Lynaugh Road

Route 96 at Lynaugh Road Roundabout

Village of Victor / Town of Victor
Ontario County

PUBLIC INFORMATION MEETING

Victor Town Hall - 85 E Main St

Victor, NY 14564

May 1, 2019

4:00 - 7:00 PM


What is a Roundabout?

A roundabout is a circular intersection designed to enhance safety and reduce delays.

Today in New York State, we are building modern roundabouts that reduce vehicle speeds, which in turn help traffic flow more smoothly, resulting in less stop-and-go actions than typically experienced at stop-controlled or signalized intersections.

Reduced vehicle speeds and conflict points within the intersection also enhance safety for pedestrians and bicyclists. Roundabouts have the added advantage of providing a more aesthetic intersection, with less pavement, less air and noise pollution, less energy use, and more opportunity for landscaping features designed specifically for your community.

The advantages realized from the use of a modern roundabout can be attributed to the *Yield at Entry*. A motorist approaching a roundabout must slow down, stop for pedestrians, and yield to traffic (including bicyclists) already in the roundabout. When an acceptable gap in traffic occurs, the motorist enters the roundabout with a simple maneuver similar to a right turn on any street, and proceeds around the center island to take the desired exit. In the last 10 years, NYSDOT has built over 70 modern roundabouts in the State!

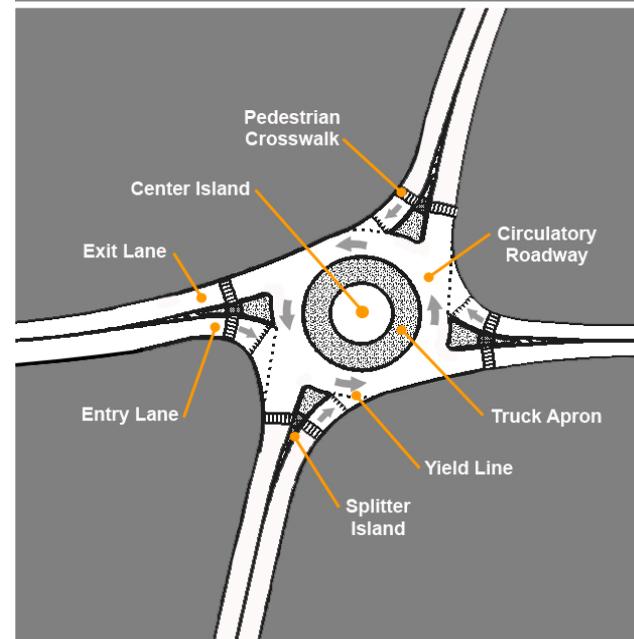

PUBLIC INFORMATION MEETING

Hosted by
The New York State
Department of Transportation

Route 96 at Lynaugh Road Roundabout Project

Wednesday, May 1, 2019

Open House 4:00 to 7:00 P.M.

Learn about the upcoming construction project, ask questions and share your comments

Victor Town Hall

85 E Main St
Victor, New York 14564

Questions?

Joshua Brasacchio
Project Design Engineer
(585) 371-9246
joshua.brasacchio@dot.ny.gov

PROJECT INFORMATION

PROJECT LOCATION

Intersection of NY Route 96 and Lynaugh Road in the Town/Village of Victor, Ontario County.

PROJECT NEED

The intersection has experienced a high frequency of crashes with the crash rate being roughly 5 times the statewide average. The predominant crash patterns involve right angle and rear-end crashes on NY Route 96.

PROJECT OBJECTIVE

Enhance safety at the NY Route 96 / Lynaugh Road intersection.

PROPOSED WORK

- Construct a modern roundabout to the northeast of the current intersection (property acquisition will be required).
- Re-align approximately 400 ft. of Lynaugh Road and construct at a slightly less grade (12%).
- Install new closed drainage system, new sidewalk, retaining wall, driveways, lighting, landscaping, striping and signs.

ESTIMATED COST

Approximately \$2.8 million

PROJECT SCHEDULE

Anticipated Design Completion

- Fall 2019

Anticipated Construction

- Spring / Summer 2020

PROPOSED METHOD TO MAINTAIN TRAFFIC DURING CONSTRUCTION

- Construct as much of the new roundabout and approaches outside of the current roadway while maintaining existing traffic patterns.
- Close both NY Route 96 and Lynaugh Road to traffic for **6 weeks** and utilize a detour to construct remaining portion of the roundabout and approaches.
- Detour utilizing NY Route 332, Boughton Hill Road (CR 41) and NY Route 444 (see map).
- Road closure would be during summer months.
- Access to residences within the project limits will be maintained during construction.

